
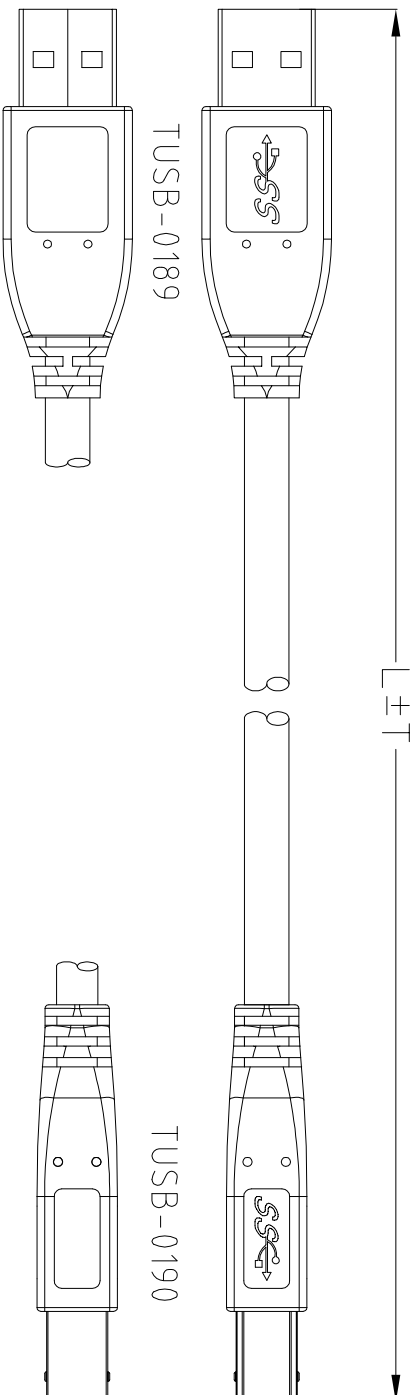



ROHS-COMPLIANT

USB 3.0 A/M 9PIN
INS:BLUE(PT 300C)

USB 3.0 B/M 9PIN
INS:BLUE(PT 300C)



NOTE:

1.CABLE: UL -2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)

+AL/My +Hot-melt-My[ar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin
+#28(7/0.127 T.C)×2C INS:Polyolefin+AL/My+B.D(85%)

PVC JACKET, OD:5.2±0.15mm COLOR:BLACK(NK-K01) REV 3.0.

2.CONNECTOR:

P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.

P2: USB 3.0 B TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.

3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01).

4.ELECTRICAL TEST:

(1)100% OPEN SHORT & MIS WIRE TEST.

(2)CONTACT RESISTANCE 3 ohm Max.

(3)INSULATION RESISTANCE 10M ohm Min.

(4)HI-POT DC300V

5.PACKING:SEE P-0210

<1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL

<2>EACH CARTON / ROHS LABEL(L×W=35×22mm)

LTR	REV.	DESCRIPTION	DATE

PIN OUT	P1	P2
1	RED	1 PWR
2	WHITE	2 UTP_D-
3	GREEN	3 UTP_D+
4	BLACK	4 GND_PWRrt
5	BLUE	5 SDP1-
6	YELLOW	6 SDP1+
7	D.W	7 SDP1_Drain & SDP2_Drain
8	PURPLE	8 SDP2-
9	ORANGE	9 SDP2+
	B.D	SHELL

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

Draw		FANNIE 01/11/10'	
Check		Customer P/N	
Title		USB 3.0 A/M - B/M CABLE	

170-3764-2	CU0025	3000±30	4260113571026
170-3764-1	CU0024	2000±30	4260113571019
DWG	P/N	L±T(mm)	BAR CODE

App'd	Customer: E-DIR
Scale: NONE	Units: M/M
Dwg No. 170-3764	REV: A
Engr	Third Angle Projection
	Sheet: 1/1

2DIRECT GMBH